
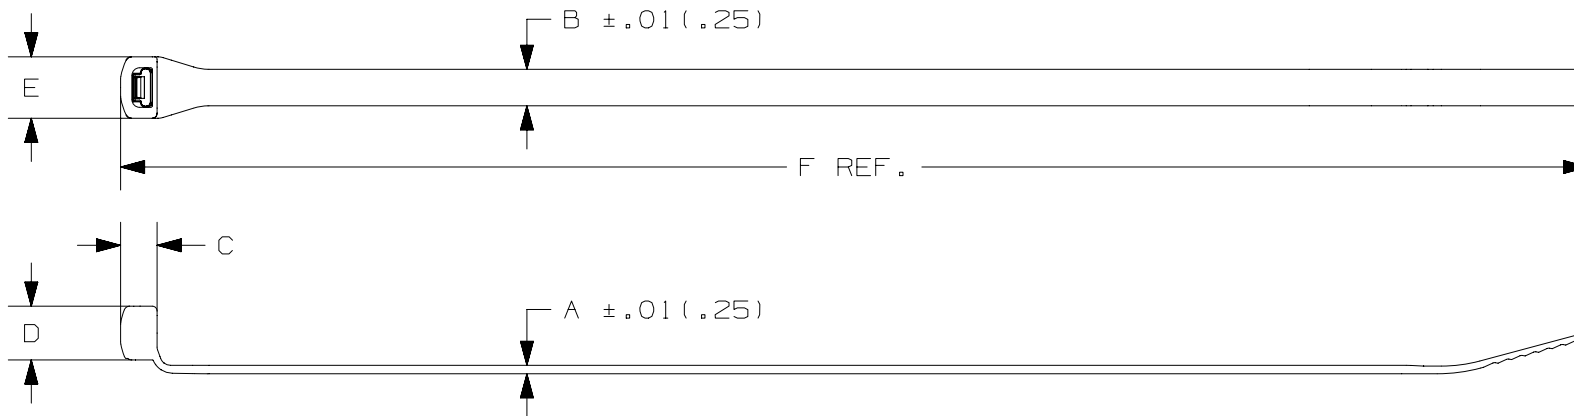


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)									
CBR2S	.160 (4.1)	2.0 (50.8)	.044 (1.1)	.190 (4.8)	.190 (4.8)	.280 (7.1)	.332 (8.4)	7.6 (193)	50 (222)	STANDARD	.24 (107)
CBR3S	.280 (7.1)	3.0 (76.2)	.052 (1.3)	.190 (4.8)	.215 (5.5)	.280 (7.1)	.332 (8.4)	10.8 (274.3)	50 (222)	STANDARD	.39 (174.8)
CBR4S	.280 (7.1)	4.0 (101.6)	.052 (1.3)	.190 (4.8)	.215 (5.5)	.280 (7.1)	.332 (8.4)	14.0 (355.6)	50 (222)	STANDARD	.48 (218.6)
CBR2HS	.160 (4.1)	2.0 (50.8)	.058 (1.4)	.250 (6.4)	.240 (6.1)	.326 (8.2)	.388 (9.9)	8.0 (203.2)	85 (378)	HEAVY/STANDARD	.43 (195)
CBR4LH	.315 (8.0)	4.0 (101.6)	.070 (1.8)	.300 (7.6)	.322 (8.2)	.400 (10.2)	.490 (12.4)	14.6 (370.8)	120 (534)	LIGHT/HEAVY	1.13 (515.8)
CBR6LH	.315 (8.0)	6.0 (152.4)	.070 (1.8)	.300 (7.6)	.322 (8.2)	.400 (10.2)	.490 (12.4)	20.9 (530.9)	120 (534)	LIGHT/HEAVY	1.61 (731.5)

\* SEE [www.panduit.com](http://www.panduit.com) FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	MATERIAL:	DRAWING NUMBER:	SIZE
							CBR SERIES CABLE TIE	NYLON 6.6	SS-27295	A
							CUSTOMER DRAWING			
							ITEM REVISION NAME			
							10B0150V/01			
							DATASET FILE NAME			
							10B0150V_DC/01_SS-27295_REV05			
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			
05	6/19/15	BWG	MPH	JADE	CORRECTED MATERIAL NOTE.	SS-27295/05	.x ± .01 [ .25 ]      .xxx ± .020 [ .51 ] .xx ± .02 [ .5 ]      ANGLES ±			
4	11.19.14	BDK	MPH	JADE	UPDATED TITLE BORDER AND UPDATED NOTES	SS-27295	 THIRD ANGLE PROJECTION			
							DRAWN BY	SCALE	SHT 1 OF 1	
							JABO	NONE		A
							DATE			
							6/22/01			
							CHK			
							TGS			

D10100DA/16