

B1



Contour-Ty® Cable Ties – Nylon 6.6

- For indoor use
- Unique design prevents wire and cable damage
- Low profile head avoids snags and reduces overall bundle size
- Outside teeth and smooth round edges protect cable jacket – ideal for high vibration applications
- Parallel-entry limits exposure to sharp edges and protects workers' arms/hands
- Fully enclosed head for consistent strength
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- UL Listed for use in plenum or air handling spaces per NEC
- Nylon 6.6 cable ties in natural and colors meet the testing requirements of SAE Aerospace Standard AS23190 and the dimensional requirements of SAE Aerospace Standard AS33671

B2



B3

C1

C2

C3

C4

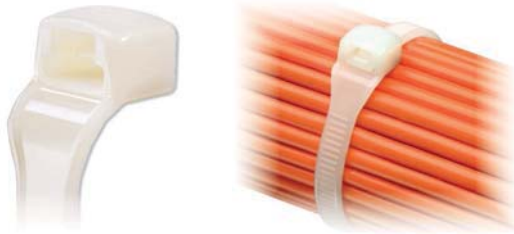

D1

D2

D3

E1

E2

E3

E4

E5

F

G

H

Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
Miniature Cross Section – Plenum Rated													
CBR1M-M	4.1	104	0.098	2.5	0.038	1.0	1.00	25	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	50000
CBR1.5M-M	5.8	147	0.098	2.5	0.042	1.1	1.50	38					
CBR2M-M	7.3	185	0.098	2.5	0.042	1.1	2.00	51	18	80		1000	25000
Intermediate Cross Section – Plenum Rated													
CBR1.5I-M	5.9	150	0.140	3.6	0.040	1.0	1.50	38	40	178	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	25000
CBR3I-M	10.4	264	0.140	3.6	0.052	1.3	3.00	76					
CBR4I-M	13.6	345	0.140	3.6	0.052	1.3	4.00	102	40	178		1000	10000
Standard Cross Section – Plenum Rated													
CBR2S-M	7.6	193	0.190	4.8	0.044	1.1	2.00	51	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	1000	10000
CBR3S-M	10.8	274	0.190	4.8	0.052	1.3	3.00	76					
CBR4S-M	14.0	356	0.190	4.8	0.052	1.3	4.00	102	50	222		1000	5000
Heavy-Standard Cross Section – Plenum Rated													
CBR2HS-D	8.0	203	0.250	6.4	0.058	1.4	2.00	51	85	378	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	500	5000
Light-Heavy Cross Section – Plenum Rated													
CBR4LH-TL	14.6	371	0.300	7.6	0.070	1.8	4.00	102	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
CBR6LH-C	20.9	531	0.300	7.6	0.070	1.8	6.00	152	120	534		100	2000